




Safe Sustainable Savings™


SPECIFICATIONS:

**STANDARD  
PALLET:  
40 X 48 SK H**

|                         |                    |
|-------------------------|--------------------|
| Narrow Side x Wide Side | 40 x 48 in.        |
| Height                  | 4.00 in.           |
| Weight*                 | 7.7 lb.            |
| Design Static Load**    | 3300 lb.           |
| Top Pallet Blank        | 40 x 76 in.        |
| Bottom Pallet Blank     | 48 x 70 in.        |
| Truckload Quantities*** | 2520 pallets (KDF) |

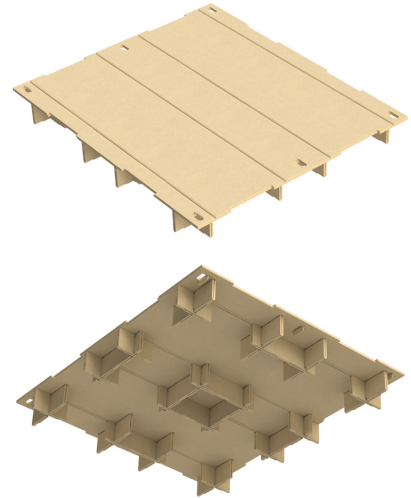

**FEATURES: No Bottom Deck, Full Four Way Entry, Smooth Top Surface.**

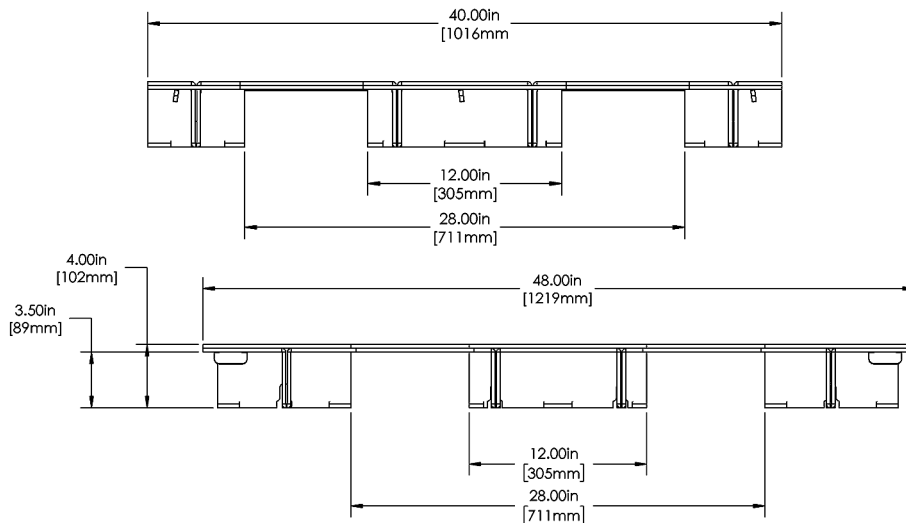

\* Pallet weight based on a specific corrugated board combination, which is adjustable for application requirements.

\*\* Lifdek corrugated pallets are not designed for unsupported racking, unevenly distributed loads, or wet environments unless properly treated. Performance varies depending on board combinations, and each application requires testing to ensure pallets meet specific needs.

\*\*\* Truckload quantities on 53 foot (16.2m) trailers.